

ACCESSORIES


OPPOSED BLADE DAMPER

MODELS: OB-DMR, OB-DMQ

SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches (mm)

model OB-DMR

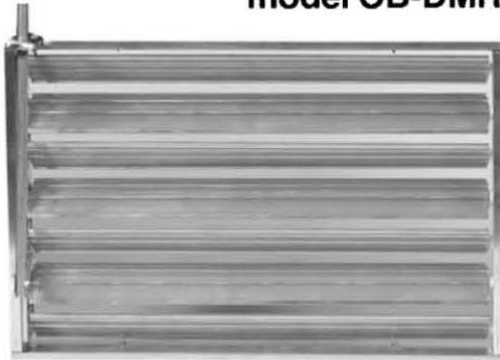

model OB-DMQ



MODEL:

OB-DMR

Opposed blade damper with direct mount rod.

OB-DMQ

Opposed blade damper with direct mount square rod.

DESCRIPTION:

1. Model OB-DMR is identical in design to the model OB-L in that legs are mounted on the frame of the unit, and the blade adjustment of this model is accomplished with a 1/4" round rod. The rod extends through the duct in a fitting similar to the model SRP-14 ball-action Durodyne fitting, or a Young regulator model 950. These are not furnished by the factory.
2. The model OB-DMQ is identical in design to the OB-DMQ except that blade adjustment is accomplished by using a 3/8" square rod on the end of the unit that protrudes through the duct. There is a factory-furnished round disc which indicates the "OPEN" and "CLOSED" positions and mounts on the exterior of the duct.

OPTIONS:

1. Finish

- ANOD Clear Anodized
- WHITE
- MB Medium Bronze
- B Black
- Custom _____

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.