

# CEILING GRILLES SERIES WITH MULTI-SHUTTER DAMPER

CEILING SUPPLY GRILLES AND REGISTER

MODELS: CB1(OB), CB2(OB), CB3(OB), CB4(OB)


SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches (mm)

### 1-WAY






### 2-WAY



### 3-WAY



### 4-WAY

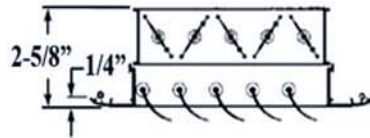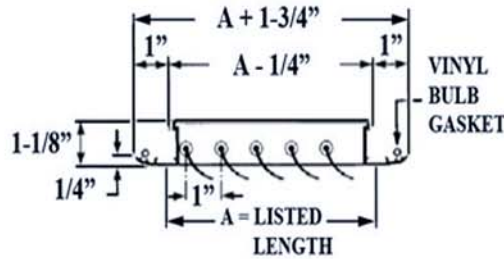

A = LISTED LENGTH, B = LISTED HEIGHT

- CB1**  
Curved blade ceiling diffuser-1 way
- CB1OB**  
Curved blade ceiling diffuser-1 way with opposed blade damper.
- CB2**  
2-way Curved blade ceiling diffuser.
- CB2OB**  
2-way Curved blade ceiling diffuser with opposed blade damper.
- CB3**  
3-way Curved blade ceiling diffuser.
- CB3OB**  
3-way Curved blade ceiling diffuser with opposed blade damper.
- CB4**  
4-way Curved blade ceiling diffuser.
- CB4OB**  
4-way Curved blade ceiling diffuser with opposed blade damper.

### DESCRIPTION:

- Frames and blades are 6063 extruded aluminum alloy with 200-R1 satin anodized finish. The frame has a typical wall thickness of .050" and is separated from the blades with injection-molded nylon bushings. This method of assembly eliminates corrosion and vibration. The frame mounting holes are dimpled, allowing for a counter-sunk fastener head appearance.
- The blades are curved in design, individually adjustable and spaced 1" on center. At the outer edge of the frame is a specially engineered channel which retains an extruded flexible vinyl bulb gasket that produces a positive air seal at the mounting surface, minimizing smudging.
- Square and rectangular patterns are available. Suitable for ceiling applications.
- Available in clear anodized, white or a variety of custom colors.

### OPTIONS:

- Finish
  - ANOD Clear Anodized
  - WHITE
  - MB Medium Bronze
  - B Black
  - Custom \_\_\_\_\_
- Option
  - 2-way Corner Blow, PLT Panel Lay-in T-bar available

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.