

CEILING GRILLES SERIES WITH MULTI-SHUTTER DAMPER

CURVED BLADE SUPPLY REGISTER WITH PARALLEL BLADE DAMPER

MODELS: CB1ML, CB2ML, CB3ML, CB4ML

SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches (mm)

1-WAY





2-WAY



3-WAY



4-WAY

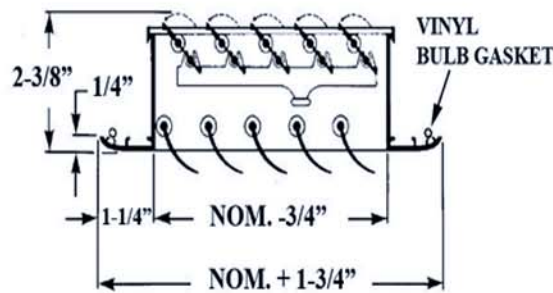

CB1ML

1-way curved blade supply register with parallel blade damper.

CB2ML

2-way curved blade supply register with parallel blade damper.

CB3ML

3-way curved blade supply register with parallel blade damper.

CB4ML

4-way curved blade supply register with parallel blade damper.

DESCRIPTION:

1. Frames and blades are 6063 extruded aluminum alloy with 200-R1 satin anodized finish. The frame has a typical wall thickness of .050" and is separated from the blades with injection-molded nylon bushings.
2. The register blades are curved in design, individually adjustable and spaced 1" on center. At the outer edge of the frame is a specially engineered channel which retains an extruded flexible vinyl bulb gasket that produces a positive air seal at the mounting surface, minimizing smudging.
3. Square and rectangular patterns are available. Suitable for ceiling applications.
4. Available in clear anodized, white or a variety of custom colors.

OPTIONS:

1. Finish

- ANOD Clear Anodized
- WHITE
- MB Medium Bronze
- B Black
- Custom _____

2. Option

- PLT Panel Lay-in T-bar available
- 2-way Corner Blow

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.