AIRGUIDE
LIFETIME AIR DISTRIBUTION ADVANTAGE

CEILING GRILLES SERIES WITH MULTI-SHUTTER DAMPER

CURVED BLADE SUPPLY REGISTER WITH PARALLEL BLADE DAMPER

MODELS: CB1MLME, CB2MLME, CB3MLME, CB4MLME

SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches (mm)

1-WAY

2-WAY



3-WAY

4-WAY

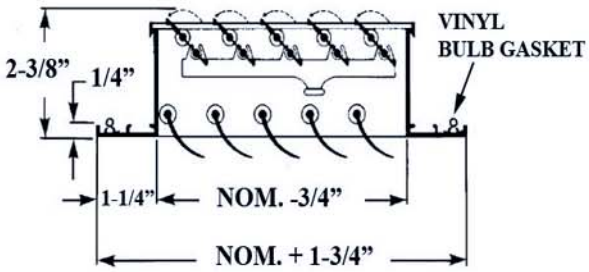

☐ **CB1MLME**

1-way curved blade supply register with square contour frame and parallel blade damper.

☐ **CB2MLME**

2-way curved blade supply register with square contour frame and parallel blade damper.

☐ **CB3MLME**

3-way curved blade supply register with square contour frame and parallel blade damper.

☐ **CB4MLME**

4-way curved blade supply register with square contour frame and parallel blade damper.

DESCRIPTION:

1. Frames and blades are 6063 extruded aluminum alloy with 200-R1 satin anodized finish. The frame has a typical wall thickness of .050" and is separated from the blades with injection-molded nylon bushings.
2. The register blades are curved in design, individually adjustable and spaced 1" on center. At the outer edge of the frame is a specially engineered channel which retains an extruded flexible vinyl bulb gasket that produces a positive air seal at the mounting surface, minimizing smudging.
3. Square and rectangular patterns are available. Suitable for ceiling applications.
4. Available in clear anodized, white or a variety of custom colors.

OPTIONS:

1. Finish
   - ☐ ANOD Clear Anodized
   - ☐ WHITE
   - ☐ MB Medium Bronze
   - ☐ B Black
   - ☐ Custom _____
2. Option
   - ☐ PLT Panel Lay-in T-bar available
   - ☐ 2-way Corner Blow

PROJECT:			
ENGINEER:	DATE	SERIES	DRAWING NO.
CONTRACTOR:			

AirGuide Manufacturing, LLC reserves the right to change any information concerning product or pricing without notice.