

SIDEWALL SERIES
DOUBLE DEFLECTION SUPPLY GRILLES AND REGISTERS
MODELS: VH, VHOB, HV, HVOB



SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches (mm)

VH



HV

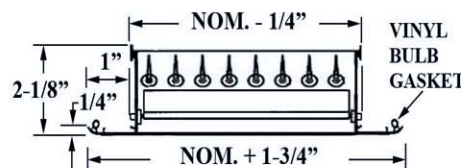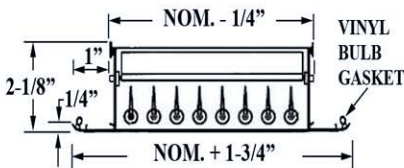

VH

Double Deflection Supply Grille with Front Blades Parallel to the Vertical Dimension

VHOB



Double Deflection Supply Register Front Blades Parallel to the Vertical Dimension (includes OB Damper)

HV

Double Deflection Supply Grille with Front Blades Parallel to the Horizontal Dimension

HVOB

Double Deflection Supply Register with Front Blades Parallel to the Horizontal Dimension (includes OB Damper)

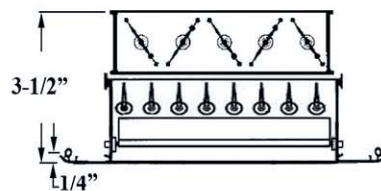

DESCRIPTION:

1. Construction: 6063 Extruded aluminum frame mechanically interlocked with hairline mitered corner for strength. A double set of 6063 extruded aluminum blades on 3/4" (19.05) centers provide air control in both vertical and horizontal planes. Blades are individually adjustable with zero metal-to-metal contact with the use of nylon bushings to eliminate noise, corrosion and vibration. Extruded flexible vinyl gasket is standard and produces a perfect positive air seal.
2. Optional screwdriver operated opposed blade damper with nylon bushings.
3. Standard fastening is countersunk screw holes.
4. ME (square contour) a standard frame style.
5. Standard finish is White.

OPTIONS:

1. Finish

- ANOD Clear Anodized
- MB Medium Bronze
- B Black
- Custom _____

2. Frame style

- Beveled Frame Available

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.