


SIDEWALL SERIES

SINGLE DEFLECTION SUPPLY REGISTER WITH MULTI-SHUTTER
PALLALEL BLADE DAMPER

MODELS: VMLME, HMLME


SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches (mm)

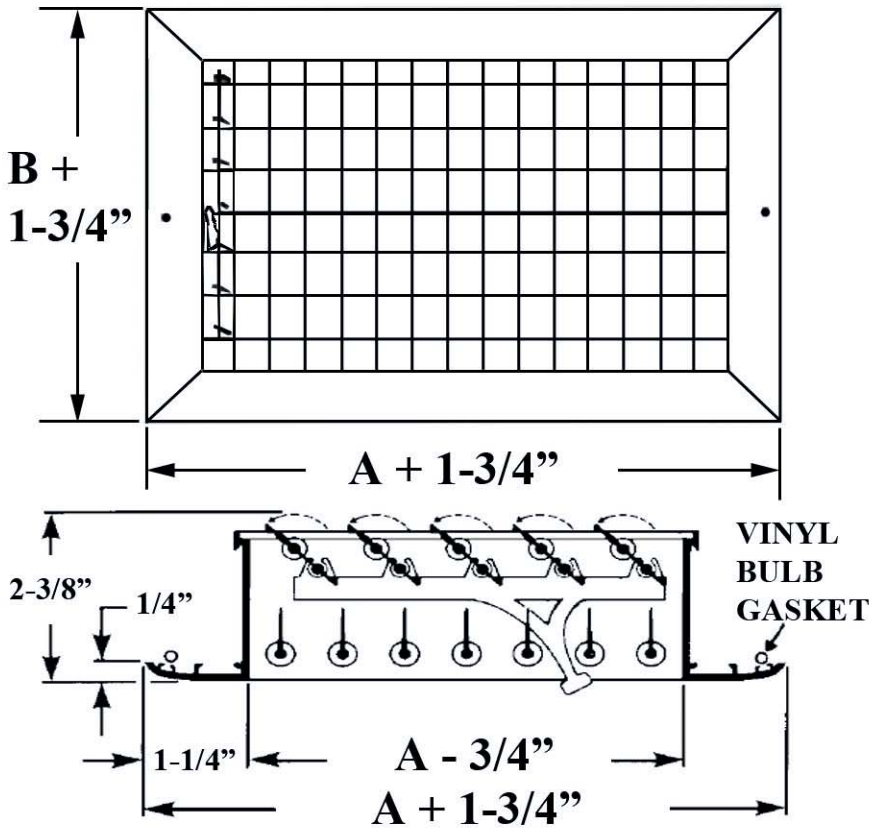

MODEL:

VMLME

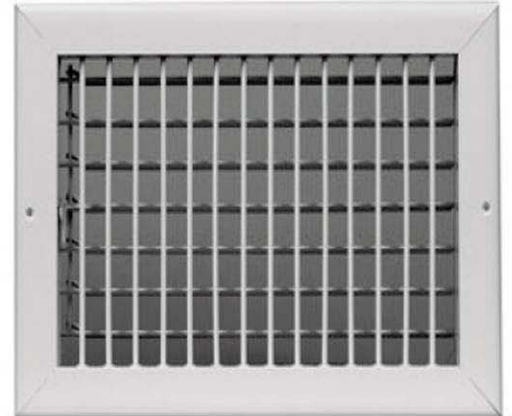

VMLME

Single Deflection Supply Register with Vertical Blades (includes multi-shutter damper)

HMLME

Single Deflection Supply Register with Horizontal Blades (includes multi-shutter damper)

DESCRIPTION:

1. Construction: 6063 Extruded aluminum frame mechanically interlocked with hairline mitered corner for strength. A single set of 6063 extruded aluminum blades on 3/4" (19.05) centers provide air control in a single plane. The register blades and damper blades are mounted in the same extrusion. The parallel blade damper is operated from the face with an aluminum operator handle. Blades are individually adjustable with zero metal-to-metal contact with the use of nylon bushings to eliminate noise, corrosion and vibration. Extruded flexible vinyl gasket is standard and produces a perfect positive air seal.
2. Optional screwdriver operated opposed blade damper with nylon bushings.
3. Standard fastening is countersunk screw holes.
4. ME (square contour) a standard frame style.
5. Standard finish is White.

OPTIONS:

1. Finish

- ANOD Clear Anodized
- MB Medium Bronze
- B Black
- Custom _____

2. Frame style

- Beveled Frame Available

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.