


SIDEWALL SERIES
SINGLE DEFLECTION SUPPLY GRILLES AND REGISTERS
MODELS: V, VOB, H, HOB


SUSTAINABLE EXTRUDED ALUMINUM

Dimensions are in inches (mm)





V

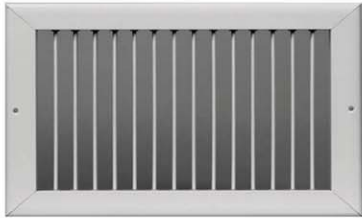

H

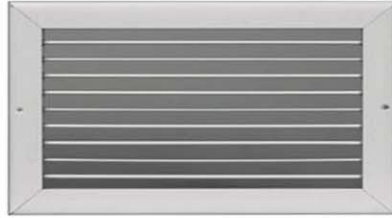

- V**
Single Deflection Supply Grille with Vertical Blades
- VOB**
Single Deflection Supply Register with Vertical Blades (includes OB Damper)
- H**
Single Deflection Supply Grille with Front Blades Parallel to the Horizontal Dimension.
- HOB**
Single Deflection Supply Grille with Front Blades Parallel to the Horizontal Dimension and with OB Damper.

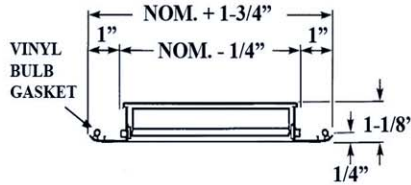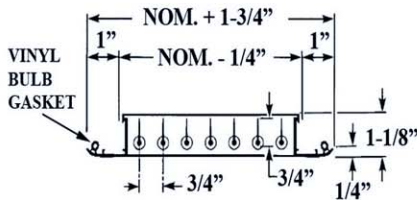

DESCRIPTION:

1. Construction: 6063 Extruded aluminum frame mechanically interlocked with hairline mitered corner for strength. A single set of 6063 extruded aluminum blades on 3/4" (19.05) centers provide air control in a single plane. Blades are individually adjustable with zero metal-to-metal contact with the use of nylon bushings to eliminate noise, corrosion and vibration. Extruded flexible vinyl gasket is standard and produces a perfect positive air seal.
2. Optional screwdriver operated opposed blade damper with nylon bushings.
3. All blades are airfoil in design, individually adjustable and spaced 3/4" on center. At the outer edge of the frame is a specially engineered channel which retains an extruded flexible vinyl bulb gasket that produces a positive air seal at the mounting surface, minimizing smudging.
4. Standard fastening is countersunk screw holes.
5. ME (square contour) is standard frame style.
6. Standard finish is White.

OPTIONS:

1. Finish
 - ANOD Clear Anodized
 - MB Medium Bronze
 - B Black
 - Custom _____
2. Frame style
 - Beveled Frame Available

PROJECT:

ENGINEER:

CONTRACTOR:

DATE

SERIES

DRAWING NO.